



safety and convenient




Human Design
Safety Detector (Prevent Human Injury)



Thunder & Water Resistance
Reliable & Powerful



Screw Driven



The whole system
can continue operating
without interruption
during a power break.

Backup Battery
(last for 48 hour)

make a
happy family

Choice

Ideal for swing gate and folding gate (Residential & Industrial)

Reliable

Maximum strength, structural resistance and protection against severe weather conditions

Quality

Selected materials and perfect coupling among the various parts

Safety


Detection of unforeseen events and prevention of obstacles

Simplicity

Easy installation and maintenance



Wiring Diagram

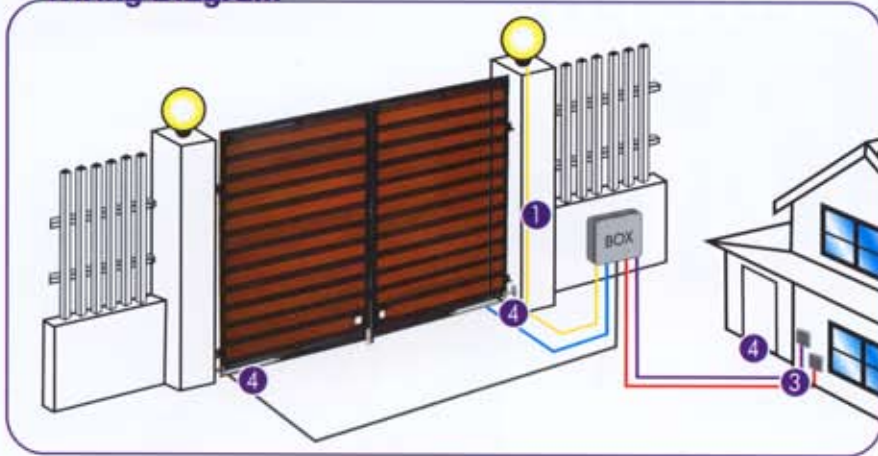

Particulars


			Wire	Type					
	Control Panel		Receiver		Transformer		Battery		Allan Key
	Power Supply AC 230V		3	2.5 mm					
	Indoor Push Button		4	1.5 mm					
	Motor (A)		4	1.5 mm					
	Motor (B)		4	1.5 mm					
	Pillar Light (Optional)		1	1.5 mm					

Technical Specification



Power Supply	AC 230V	Remote Control	2 Channels (UHF)
Motor Voltage Rating	DC 12V	Battery Type	12V 7AH
Motor Speed	6000 RPM	Remote Control Range	~ 30 meter
Open/Close Speed (90 Angle)	12 sec - 18 sec	Product Warranty	1 Year Warranty
Max. Leaf Opening Angle	110 degree	Standby Operation By Battery	48 Hours
Arm Body	Stainless Steel / Aluminium		

Installation Dimensions

Close

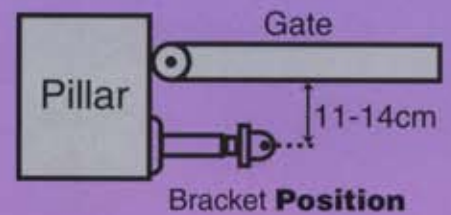

Open 90°

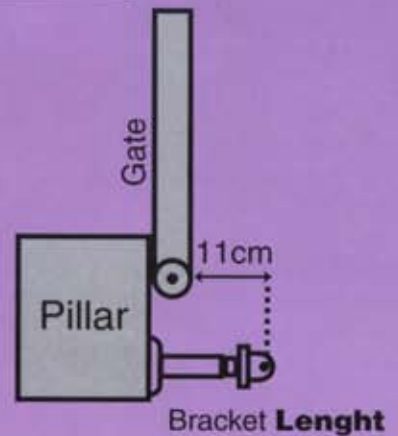

Arm Length Ending