



OPTIMO

Swing gate operators

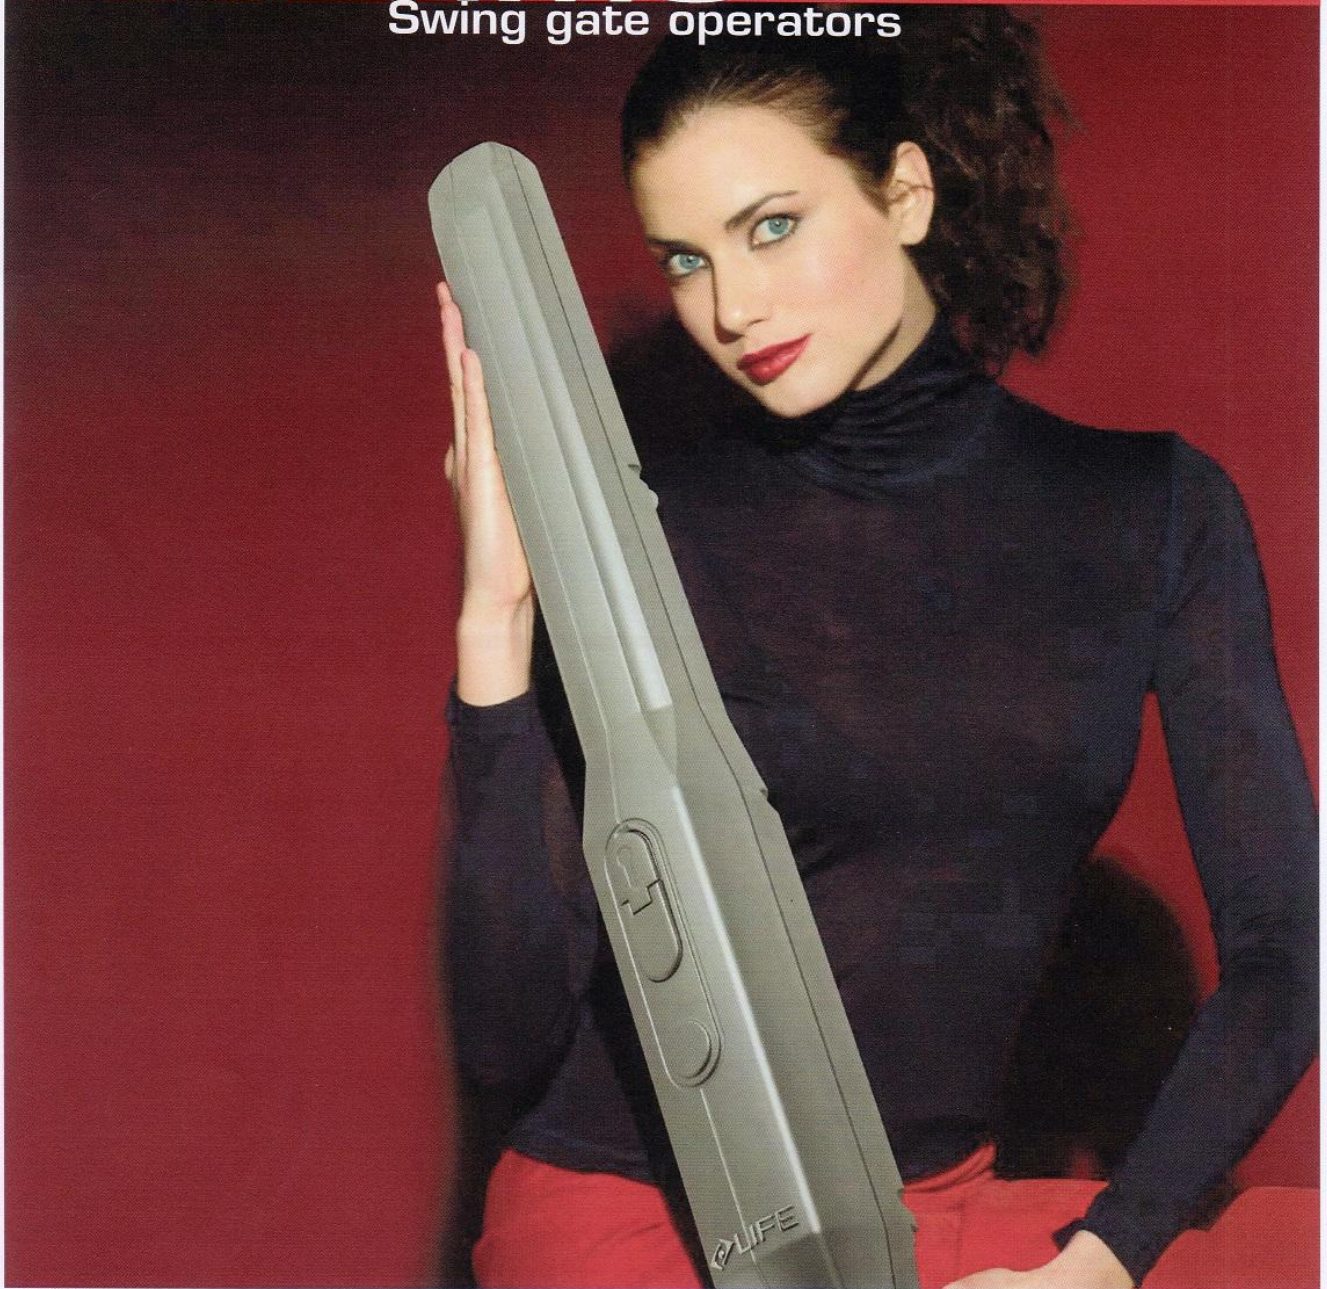

Optimo

Optimally pre-set

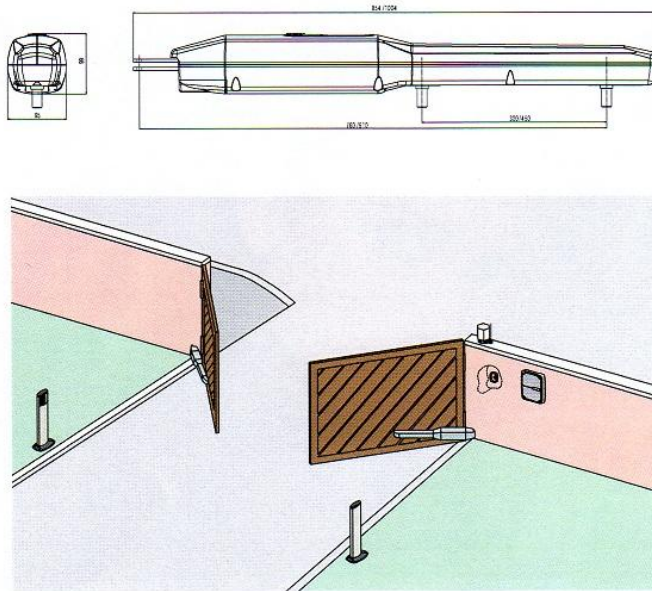

The Optimo actuator is provided with a 3m-power cable to make electrical connections simpler and quicker. It also has an internal coupling system, which facilitates maintenance. Assembly clamps are strong, modular and intelligent, ideal for resolving any installation need. Assembly instructions are clear, simple and intuitive, assisting the installer during all stages of his work. LIFE has designed everything to the finest detail, including a charming design and range of customized services.

OPTIMO

Electromechanical linear gearmotor 203V-24V, irreversible for swing gates, with encoder.

		230 V a.c. 50Hz				24 V d.c.	
		OP3	OP3L	OP5	OP5L	OP324	OP524
POWER SUPPLY	V	230 Va.c.	230 Va.c.	230 Va.c.	230 Va.c.	24 Vd.c.	24 Vd.c.
POWER	W	150	150	150	150	120	120
PUSH	N	2000	2000	2000	2000	2000	2000
LUBRICATING	Type	GREASE	GREASE	GREASE	GREASE	GREASE	GREASE
USABLE TRAVERSE ROD	mm	300	300	450	450	300	450
THERMALPROTECTION	°C	140	140	140	140		
CONNECTED WIRE	CENELEC	H07RN-F	H07RN-F	H07RN-F	H07RN-F	H07RN-F	H07RN-F
OPERATING TEMPERATURE	°C Min/Max	-20 , +70	-20 , +70	-20 , +70	-20 , +70	-20 , +70	-20 , +70
PROTECTION LEVEL	IP	54	54	54	54	54	54
SPEED	m/s	0,016	0,01	0,016	0,01	0,016	0,01
INTERMITTENCE	%	40	40	40	40	80	80
TIME FOR 90°	s	19	30	28	45	19	28
MAX LEAF'S LENGHT	kg	800	900	600	800	800	600
MAX LEAF'S WEIGHT	m	3	3	5	5	3	5
BATTERY CHARGING TIME	h					48	48
CYCLES WITH LOADED BATTERY	n°					15	10