


# SSL

## AUTOMATIC GATE SYSTEM



**Screw Driven**

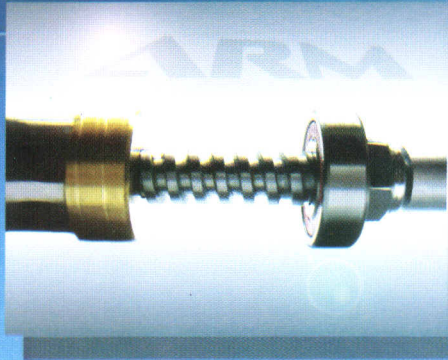


**Unique Design**



**Safety Protection**

*( tested on balloon )*

*Safe for unforeseen circumstances.  
Even gentle enough for a balloon.*

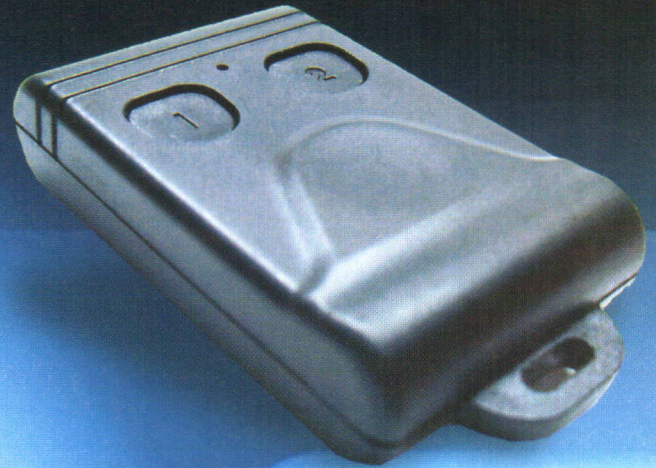

**Heavy Duty Arm**

*Over 60K times  
Open / Close tested*

❖ **Remote Control**  
*( 2 channels )*

*Operating Modes*

*1 : Single Gate*

*2 : Double Gate*


❖ **Thunder  
& Water Resistance**

**Backup Battery**

*( up to 48 hours )*




**SSL**

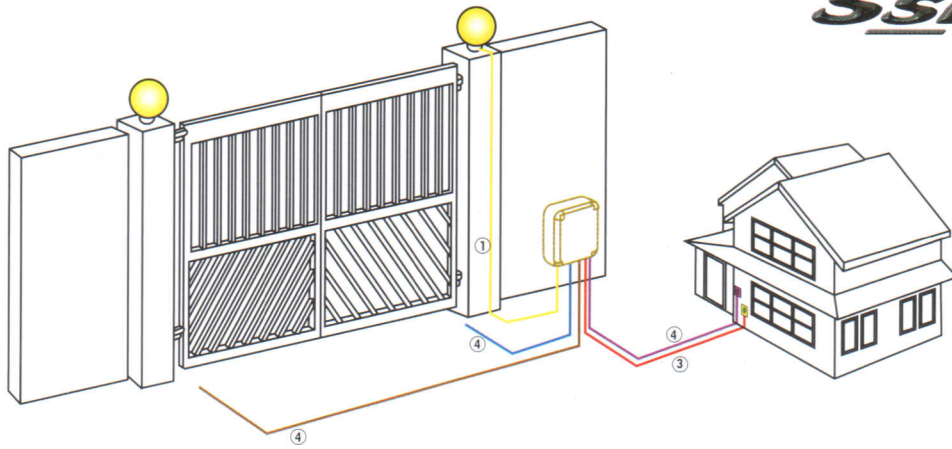


	Particulars	Core	Wires
	Control Box, Control Panel, Transformer and Receiver		
	Power Supply AC 230V	③	2.5 mm
	Indoor Push Button	④	1.5 mm
	Motor (A)	④	1.5 mm
	Motor (B)	④	1.5 mm
	Pillar Light (optional)	①	1.5 mm

**Installation Dimensions :**

**CLOSE**

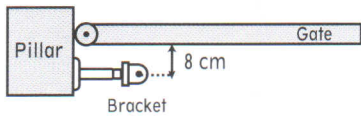

**OPEN 90°**



**Technical Specification :**

➤ Power Supply	AC 230V	➤ Remote Control	4 Channels (UHF)
➤ Motor Voltage Rating	DC 12V	➤ Battery Type	12V 7AH
➤ Motor Speed	6000 RPM	➤ Remote Control Range	~ 30 meter
➤ Open / Close Speed (90 Angle)	~ 12 sec	➤ Arm Dimensions (mm)	(L)600x(W)48x(H)48
➤ Max. Leaf Opening Angle	110 degree	➤ Product Warranty	1 Year Warranty
➤ Arm Body	Stainless Steel	➤ Stanby Operation By Battery	48 Hours

**Germany Technology**

Authorised Dealer

**SecureLink**  
alarm automation

No 6, Jalan PJS 7/9, Bandar Sunway,  
46150 Petaling Jaya, Selangor.  
Tel: 03-56378818 Fax: 03-56378817